


# Use and Installation Manual

## Freestanding hydromassage Bathtub

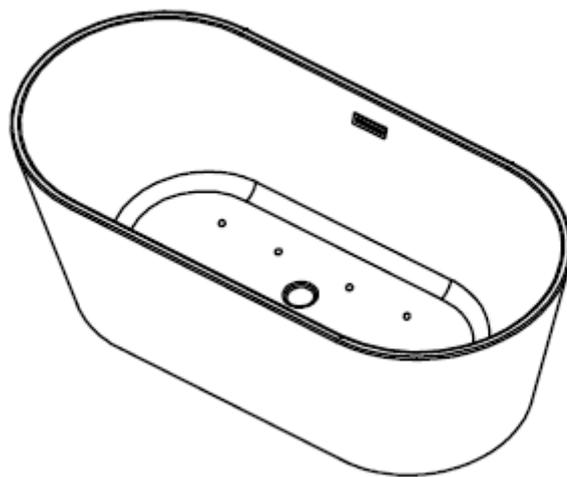

MODEL: **Spatec Lima**

MEASURES: 1700\*800\*580mm

# 1. Installation and instructions



WARNING! Danger from fire, electric shock and water leakage.



Dear customer

Thank you for choosing our product. Please take a few minutes to read this manual before starting installation.



NOTE! Improper installation, use or maintenance may invalidate the warranty and cause personal injury or property damage.

## 2. Content of the package

Thank you for choosing our hydromassage bathtub. Your product has been equipped with most of the necessary accessories. To save space during transport, some items have been packed separately. Please take a few minutes to ensure that all accessories are included.

If an item is missing, please contact the seller.

### Accessories box:

The bathtub package contains an additional box with the following items:

1. Drain
2. Drain plug



1




2

## Installation tools


For the correct installation of the bath, the following tools will be needed:

1. Level
2. Sealer
3. Spanner
4. Destornillador
5. PTFE tape

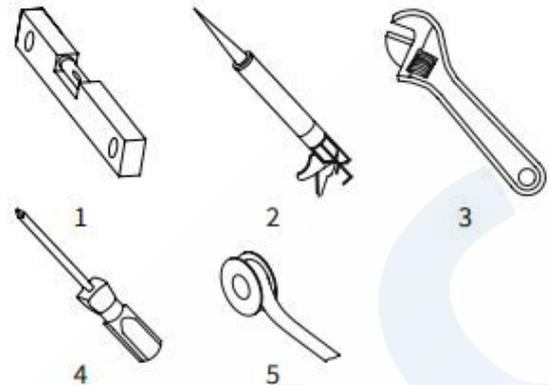

## 3. Bathtub components:

1. Air jets
2. LED spotlight
3. Overflow
4. Drain
5. Control button

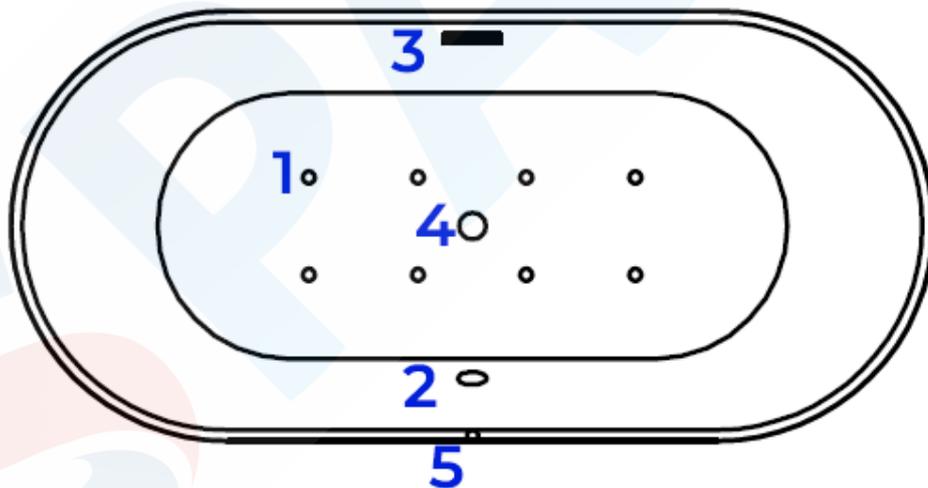

### Electrical parameters:

- Voltage 220 V
- Nominal frequency 50 Hz
- Maximum power 310 W
- Rated current 1.5 A




**Attention!** All electrical connections must be made by a certified electrician in accordance with the requirements of national electrical codes and procedures.

## 4. Connection preparation



The following measures are an example. All dimensions required for proper installation should be taken directly from the product.

### SPATEC Lima 170

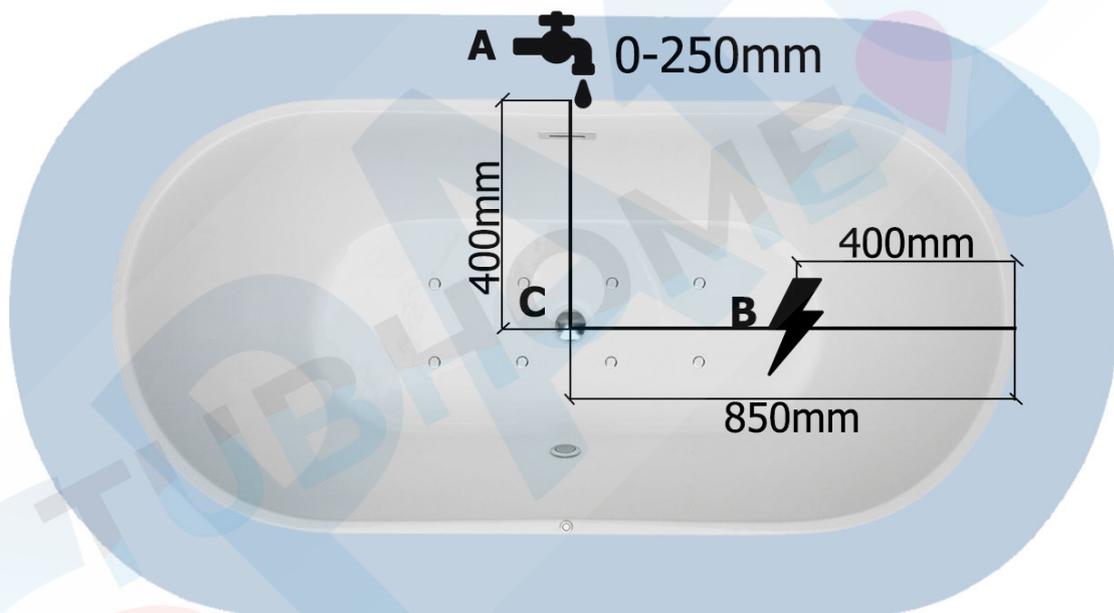


- A:** Water intake
- B:** Electrical outlet 230V – 16 A,  
3x cable 2,5mm<sup>2</sup>
- C:** Drain

**Note:** The fitting is recommended to be installed in the area marked in blue in the diagram. We recommend the installation of [specific faucets for freestanding bathtub.](#)

## 5. Installation

1. As shown in the picture below, turn the tub over, wrap the tub hole with PTFE tape and then screw in the siphon.
2. Turn the bathtub around. Move the bathtub to the right place in your bathroom; put the siphon in the drain and seal it. Adjust the feet of the bath so that the bath is horizontal and level.
3. Carry out the electrical installation, connecting the bathtub with cables of at least 2.5 mm<sup>2</sup> to a socket that has a 16A magnetothermic, 30mA differential and earthing.

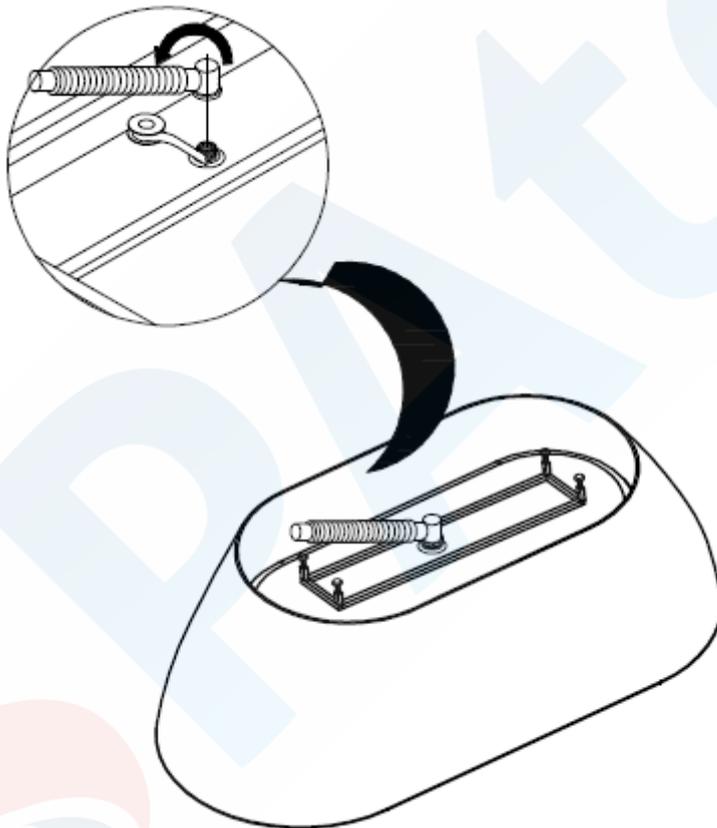

## 6. Operation

- To turn on the air jets and the LED spotlight, simply press the button on the edge of the bath.
- To turn off the functions, press the button again.

## 7. Cleaning and maintenance

1. Use generic liquid detergent and a soft cloth for daily cleaning. Do not use detergent with acetone, ammonia or strong water.
2. Scale deposits can be cleaned with citric acid or hot vinegar using a soft cloth.
3. Chrome parts do not need to be cleaned frequently.
4. To avoid scratches, do not clean the bath with hard or rough materials.
5. To avoid damage, do not use detergents with chemical solvents.
6. Be sure to drain the water after use.
7. To avoid damage, do not hit the bath with hard or sharp objects.
8. Do not approach the bath with cigarettes or heat sources higher than 70°C.
9. In order to clean the internal air ducts, it is recommended to activate the air pump for about 10 seconds after each use of the bath without water.

## 8. PRECAUTIONS

1. Installation must be performed by a qualified technician in accordance with the requirements of national electrical codes and procedures.
2. There must be a RCCB and MCB in the installation. Make sure the ground wire is properly installed.
3. Do not use water at a very high temperature. Put the cold water first, then the hot water. Do not activate the appliance until the water level is higher than the level of the jets.
4. The nominal voltage of this device is 220V. Do not use the device if the voltage is higher than 235V or lower than 190V.
5. Do not take too long baths. Recommended time: less than 30 minutes.
6. In the event of occasional system shutdown, restart the device.
7. If the power cable is damaged, it must be replaced by the manufacturer, or by qualified persons in order to avoid unnecessary risks.
8. This manual is enclosed with the product. Before installation, please read it carefully. Installation and use must be in accordance with this manual to avoid damage or accidents.